



# POLY POOLS

Australia

## Poly Pools Deck Ladder Assembly

### Poly Pools Australia –Deck Ladder Assembly Instructions

- This is a guide to the assembly of the 3 step deck ladder seen above.
- Assembly can be completed by one person in about 20 minutes
- A screwdriver and set of allen keys are required for assembly, an electric drill is required for installation into your deck and a spirit level is recommended.

**Your Ladder box will contain;** two step rails, 3 steps, and a smaller box containing two plastic 'foot pockets', 2 Aluminium blocks, 2 screws, 2 rubber ends, 6 nuts, 6 washers and 6 bolts and 2 Aluminium disks.



Open the Box Containing Your Deck Ladder



### Ensure box contains all Components

- 2 x Stainless Steel Discs and Aluminium Blocks
- 3 x Ladder Steps
- 2 x Side Railings
- 6 x Bolts, Washers, and Nuts
- 2 x Plastic 'Foot Pockets'
- 1 x Drill Bit
- 2 x Screws




Open the smaller box and discard the 'foot pockets' for non-cement surround installation




Gather together remaining components



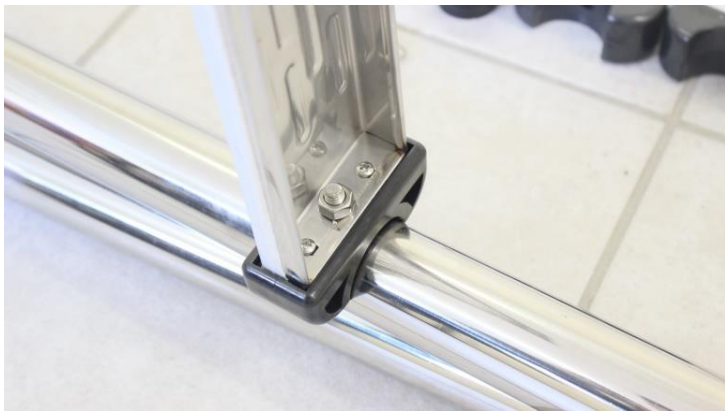

**Secure any of the three steps to either railing, leaving the washer between the bolt head and the railing**

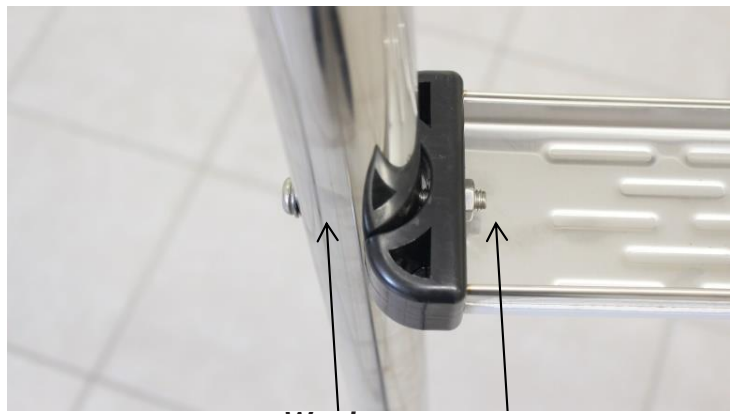

**Washer Nut**  
**Step Underside**



**Do this for all three steps**



**Do this again for the opposite rail**

## **Deck Installation**



**Ensure Steps are Plumb with a Spirit Level**



**Mark on your deck Where you want the ladder rails to sit, ensuring that the rails are installed into the joist of the deck**



**Position Aluminium blocks so that they Align with the previously made markings.**





**Secure the Aluminium blocks to the deck using provided screws, an electric screwdriver will help here greatly.**  
**If you cannot install the ladder directly into the deck joist for whatever reason, put an extra piece of timber under the deck, or drill right through the Aluminium block and deck to use a long bolt, washer, and nut done up tightly to safely secure the blocks.**



**Adjust the Aluminium blocks for a tight fit, then place the discs over the blocks.**



**Position Ladder onto the Aluminium blocks, ensure the ends are in contact with the base of the deck.**



**Using the pre-drilled holes in the ladder as a guide, use the provided drill bit to drill halfway through the Aluminium blocks on both sides of the ladder.**



**Insert and fasten the provided screws on both sides of the ladder, with this very secure fit your deck ladder is fully installed!**

#### **Final notes:**

- Remember to place provided black rubber caps on the ends of the ladder in contact with the pool wall to prevent scratching.
- A video tutorial of the final drill process is available at: <https://youtu.be/HQ5PA-H9nTQ>