

## **Poly Pools Australia –Deck Ladder Assembly**

### **Instructions 2020-10-26**



- This is a guide to the assembly of the 3 step deck ladder seen above.
- Assembly can be completed by one person in about 20 minutes
- A screwdriver, spirit level, pliers and an allen drive key are required for assembly and installation, an electric screwdriver will make the job far easier.



Open The Box Containing Your Poly Pool Ladder



Ensure box contains all components including:

- 2 Stainless Steel Discs
- 3 Steps
- 2 Side Rails
- 6 bolts, washers and nuts
- 2 Rubber Feet
- 2 Plastic 'foot pockets' (only for concrete)

You should also have:


- 2 Aluminium Blocks
- 2 Self Drill Fasten Screws



Open the smaller box and Discard 'foot pockets' for non cement-surround installation



Gather together remaining components.

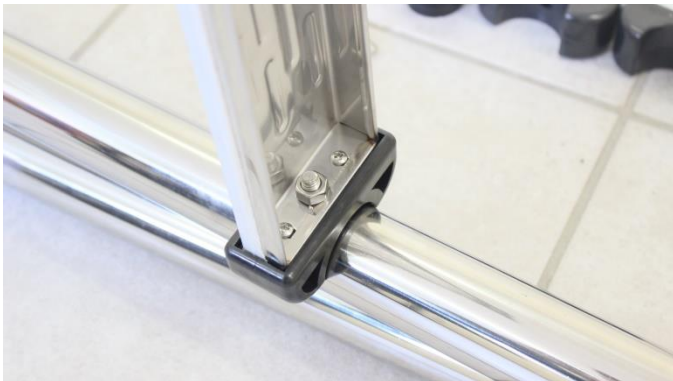

Secure any of the three steps to either railing, leaving the washer between the bolt head and the railing.



Washer  
Nut  
Step Underside



Do this for all three steps.  
step



Do the same attachments process for each  
on the other side.



Place ladder in pool and on deck. Ensure Steps are  
plumb with a spirit level



Mark on your deck where you want the ladder rails  
to sit






Position aluminium blocks so that they align with the previously made markings



Secure to the deck using provided screws, (An electric screwdriver will help here greatly.)  
If you cannot get a very solid fixing for the aluminium block, put an extra block under the deck, or drill right through the aluminium block and deck & use a long bolt, nut and washer done up very tightly to secure the block.

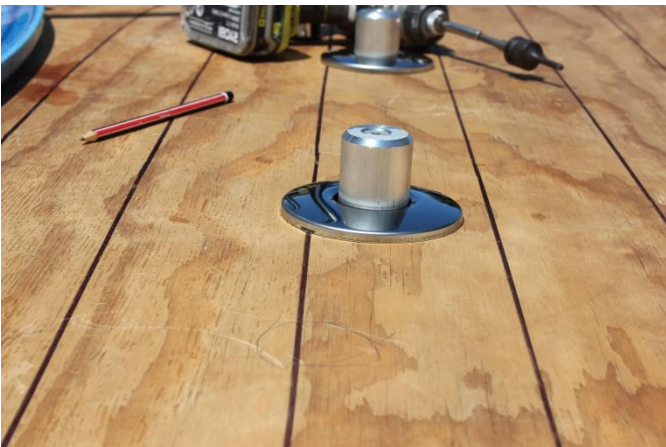

Place stainless steel covers over aluminium blocks



Position Ladder over and place onto the aluminium blocks

Your Pool Ladder will now be firmly mounted to your deck, place the black rubber caps over the foot of the rail where it is in contact with the pool to prevent scratching.

Your Deck Ladder is now ready for use in your Poly Pool!

Enjoy!

